

THE CHAIR SATISFIES THE REQUIREMENTS OF EN 12727: 2000.


FIRE RETARDENCY


THE FABRIC AND FOAM COMPLY WITH THE FOLLOWING CODES:


CALIFORNIA TECHNICAL BULLETIN TB 117 CALIFORNIA TECHNICAL BULLETIN TB 133


BS 5852:1990 (SOURCE 0, 1, AND 5).

OTHER CODES OR EUROPEAN STANDARDS CAN BE SATISFIED AS REQUIRED.

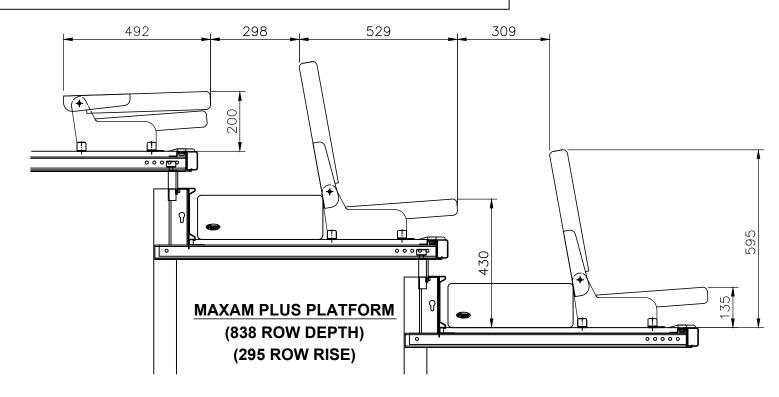

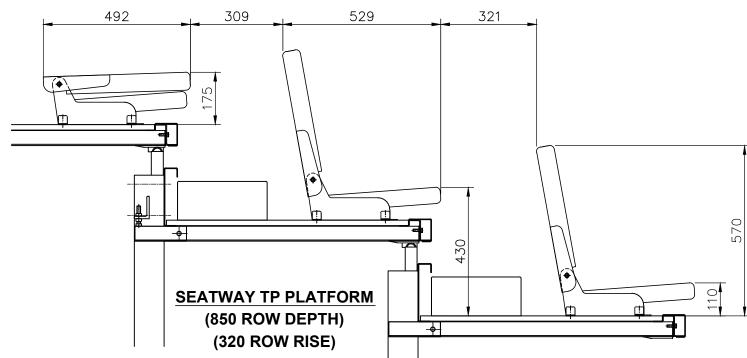

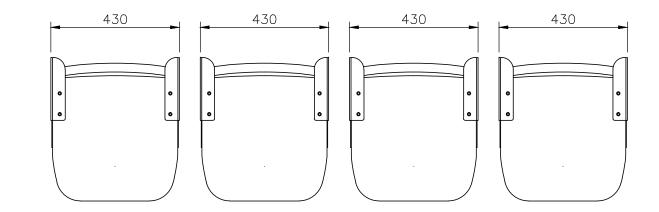

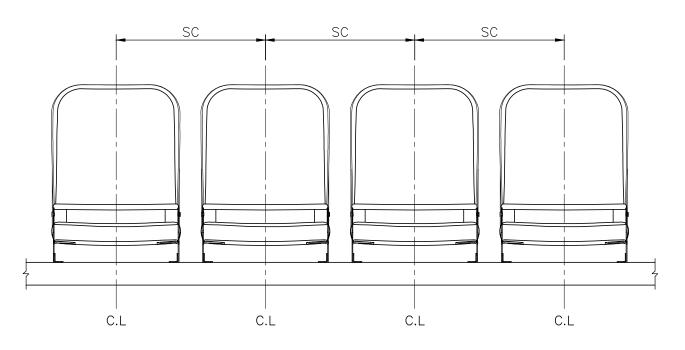

PRODUCT SPECIFICATIONS

PLATFORM APPLICATION	MIN ROW DEPTH	MIN ROW RISE	MAX ROW RISE
MAXAM PLUS	838mm	295mm	295mm
SEATWAY TP	850mm	300mm	350mm
MXP	838mm	300mm	350mm

OPERATION	MANUAL	MIN SEAT CENTRE (SC)	450mm
	SEMI-AUTO		

-				
_	CHANGED PRODUCT NAME	07/09/2015		
A	ADDED ADDITIONAL CONFIGURATION			
REVISION	DESCRIPTION	DATE		
4/vee le reconting				



www.husseyseating.com asia-pacific@husseyseating.com

PREMIA

PRODUCT SPECIFICATION LAYOUT

DRAWN THN CHECKED TMP A3

DRAWING NUMBER REVISION SCALE 1/12

AP95002

1/12 A DATE 30/10/2014