
## interplastic<sup>®</sup>

## **PRODUCT CARD**

# FIXED BASKETBALL CONSTRUCTION 0,5 M WITH INTEGRATED HEIGHT REGULATION MECHANISM

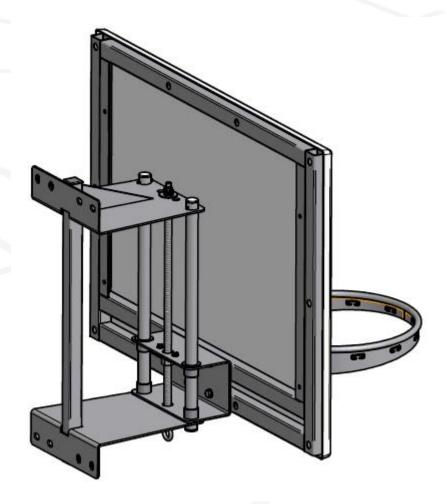

## interplastic\*

l.	List of components	3
II.	Complimentary items:	3
III.	Product description	3
	Product Purpose	
V.	Instruction of use	4
VI.	Packing	4
VII.	Warranty	4
VIII.	Maintenance and Service	4





## I. List of components

No	Name	Quantity
1.	Fixed wall frame with integrated height regulation mechanism	1 szt.
2.	Crank handle	2 szt.

#### II. Complimentary items:

### 1. Backboards

Name	Index		Q	Description	
Acrylic backboard,		Pcs	1	Professional backboard 180x105 cm made of acrylic glass 10 mm	
180x105 cm				thick. According to EN 1270 norm. Backboard is mounted to the metal frame for ring fixation.	
Acrylic backboard,		Pcs	1	Training backboard 120x90 cm made of acrylic glass 10 mm thick.	
120x90 cm				According to EN 1270 norm. Backboard is mounted to the metal	
				frame for ring fixation.	
Laminate backboard,		Pcs	1	Professional backboard 180x105 cm made of glass fibre.	
180x105 cm				According to EN 1270 norm. Backboard is mounted to the metal	
				frame for ring fixation.	
Laminate backboard,		Pcs	1	Professional backboard 120x90 cm made of glass fibre. According	
120x90 cm				to EN 1270 norm. Backboard is mounted to the metal frame for	
				ring fixation.	

### 2. Rings

Dunk ring	Pcs	1	Dunk ring (spring mechanism). Dimensions and colour according to EN 1270 norm. Hookless net installation. Ring is protected against corrosion with galvanization and then powdercoating.
Standard ring	Pcs	1	Standard basketball ring, side reinforced with 4mm steel plate.  Dimensions and colour according to EN 1270 norm. Ring is protected against corrosion with powdercoating.

## 3. Backboard protection padding (only for acrylic backboards)

Professional backboard protection padding 180x105 cm	Pcs	1	Professional backboard protection padding for 180x105 cm backboard made from special PU foam. U-width 55 mm (width of the down edge of board). Attached to 180 x 105 cm backboards
			by screws.
Standard backboard	Pcs	1	Standard backboard protection padding made of foam. Mounted
protection padding			with pegs and glue to the backboard. U-width 55 mm (width of
180x105 cm			the down edge of board)

### 4. Net

Net	Pcs	1	Polypropylene net 5mm in white colour

## III. Product description

Index	122091 (white RAL 9010)
Dimensions	Standard projection 0,5 m.
Weight	-
Colour	Any RAL colour
Certificate	Safety Certificate B

INTERPLASTIC Roger Żółtowski	NIP: PL 586 000 90 32	T +48 58 511 29 60	E info@interplastic.pl
Tuchom, ul. Gdyńska 45, 80-209 Chwaszczyno, Poland	REGON: 002854249	F +48 58 511 29 80	I www.interplastic.pl



Descriptio	Steel construction, made of steel profiles protected against corrosion with powder-coating with any
	RAL colour. The integrated height regulation mechanism allows to set the height of the ring on both
	260 and 305 cm.

#### IV. Product Purpose

Construction is designed solely for playing basketball and installation in sport halls. The purpose of the construction is to install basketball backboards and basketball rings.

#### V. Instruction of use

- 1. Installation and service can be performed only by the producer or dealers appointed by the producer.
- 2. The construction should be inspected regularly (minimum every 12 months), the inspection can be performed only by the producer or dealers appointed by the producer.
- 3. Construction is designed solely for hanging a basketball backboard and cannot be used for other purposes.
- 4. User should check occasionally the construction and whether the screws are fastened correctly. If the construction acts strange (i.e. atypical noises, damages or deflections) it's further usage is strictly forbidden. Any failure should be reported to the producer or its authorized dealer.
- 5. Backboard should be cleaned with clean foam or cotton cloth using water with delicate detergent without any texture that can scratch the surface of the backboard.
- 6. The construction is equipped with height adjustment mechanism, so the trapezoidal screw should be periodically (once every 6 months) lubricated with graphite grease.

#### VI. Packing

All elements are protected for transport with bubble and stretch foil.

#### VII. Warranty

- 1. Producer issues 24 months warranty from invoice date.
- 2. Defects or damages that occurred not due to users fault will be repaired in the warranty period by producer or authorized dealer.
- Warranty does not cover::
  - proper maintenance of equipment including periodic tightening and fastening screws and other installation elements. .
  - mechanical and chemical damages caused by improper use or maintenance (e.g. self repair or using improper chemical compounds for cleaning).
  - damages caused due to users or third party fault including acts of vandalism.
- 4. Other factors not listed in the warranty are regulated by International Civil Laws.

#### VIII. Maintenance and Service

For any queries regarding product, spare parts or problems please contact: <a href="help@interplastic.pl">help@interplastic.pl</a>