





TECHNICAL SPECIFICATIONS

- Dimensions:** 50 a 52 cm seat centres
44.5 cm depth
92 cm height
- Backrest:** Manufactured over a MDF board, bowed in roof tile-shaped, on which an open cell polyurethane foam block _upholstered by means of a fabric cover_ is fixed. All this structure is protected by a wood covering and a perimeter frame in beech compressed wood.
Foam density, 40 Kg/m³
- Seat:** Manufactured over a MDF board, bowed in roof tile-shaped, on which an open cell polyurethane foam block _upholstered by means of a fabric cover_ is fixed. All this structure is protected by a wood covering and a perimeter frame in beech compressed wood.
The seat pan folds by means of an automatic noiseless maintenance-free double spring.
Foam density, 40 Kg/m³
- Side Panel:** Wood fibres board, finish in beech. Steel central leg. Concealed floor fixation system.
- Armrest:** Included in the very side panel.
- Volume:** 0.13 m³ / unit
- Weight:** 16.20 Kg not assembled

DRAWING

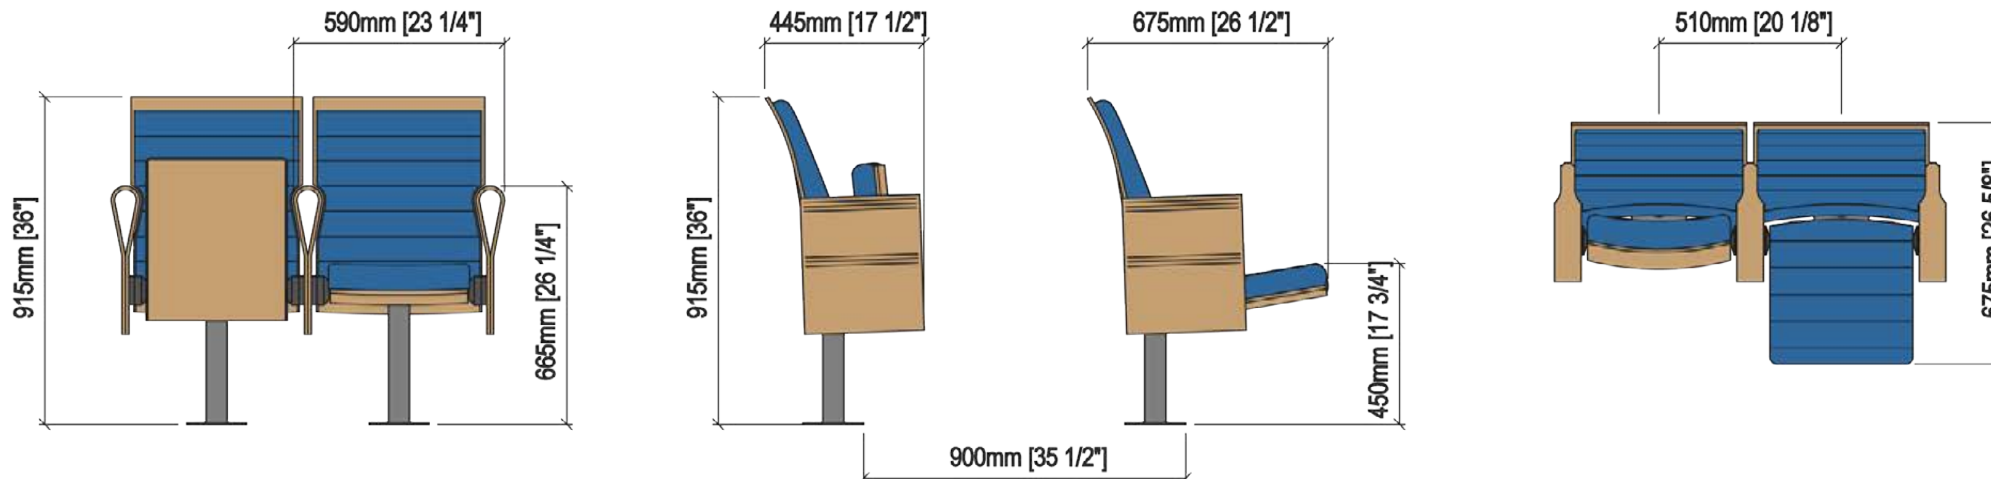

OPTIONS

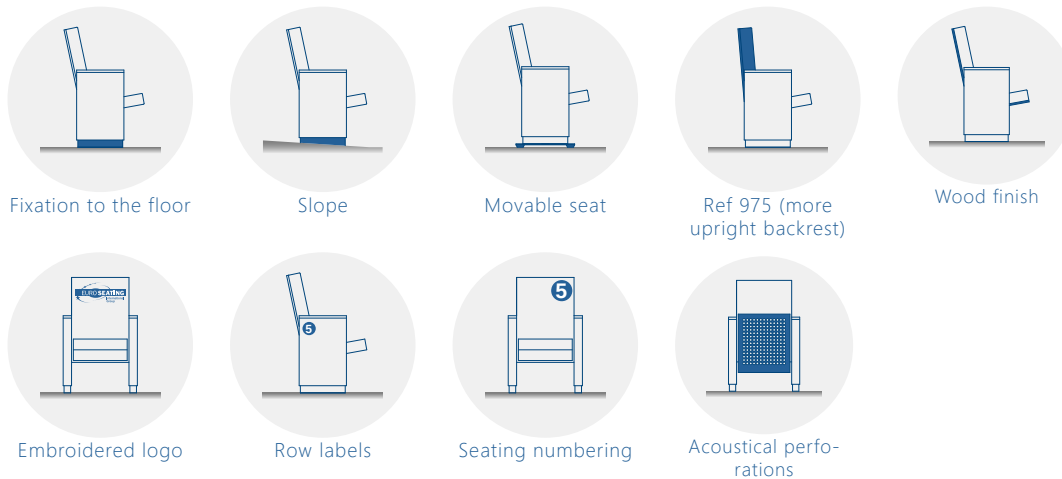

CERTIFICATES

BS 5852:2006
BS-EN 1021-1:2006
CAL TB 117-2013, SECTION 1
UNE 23.727-90 1R (M1)
UNE-EN 1021-1:2006 / UNE-EN 1021-2:2006
BS 5852:1979 Parte 1
Coeficiente de absorción acústica

Fabric	Fire Barrier	Foam	Seat
●			
●			
●			
●	●		
●	●	●	●
	●		
			●

AIDIMA
INSTITUTO TECNOLÓGICO
MUEBLE, MADERA, EMBALAJE Y VITRIS

ffmo
FEDERATION OF FURNITURE MANUFACTURERS OF EUROPE




BUREAU VERITAS
ISO 9001
Certification

BUREAU VERITAS
ISO 14001
Certification






Teatro Aracena. Huelva. SPAIN

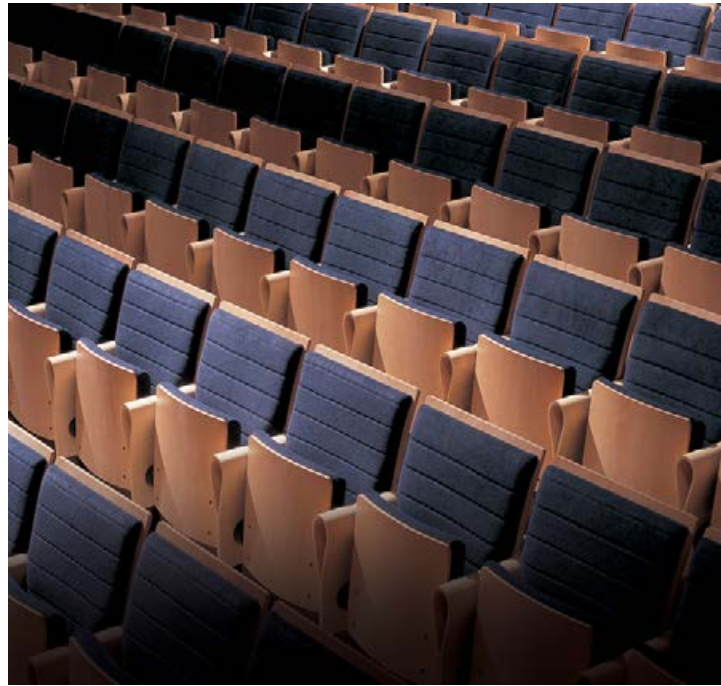

Teatro Capitol Cortegana. Huelva. SPAIN

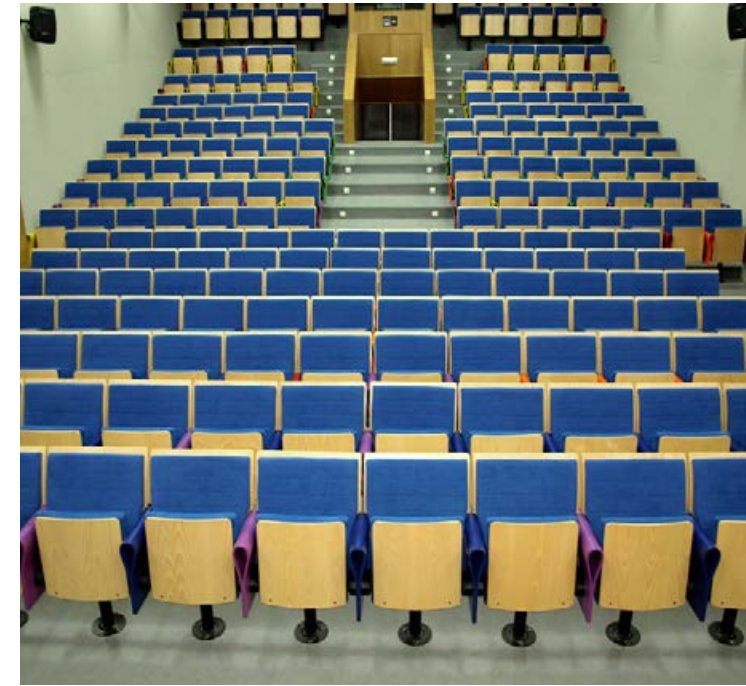

Centro tecnológico de la madera. Luceña. Córdoba. SPAIN

EURO SEATING AROUND THE WORLD

